

plasmaglow **INSTALL** LED STROBE KIT **INSTRUCTIONS**

STROBE KIT LAYOUT

Plan your kit layout before starting installation.
This is a typical layout, and may vary depending on vehicle.

INSTALLATION INSTRUCTIONS:

1- Disconnect your battery and determine where you wish to place each component of the strobe kit.

2- You will need to run the flat ribbon cable from the remote control to the control box, probably through the firewall.

3- Connect the red wire to 12V+ and the black wire to ground (-). You may optionally connect the yellow wire to a grounded signal wire for strobing with your car alarm.

4- If you need to drill in order to install a bulb, use an 11/16 bit. You may need to also apply silicone to the bulb after installing for a waterproof seal.

5- See figures A, B and C below to finish the install.

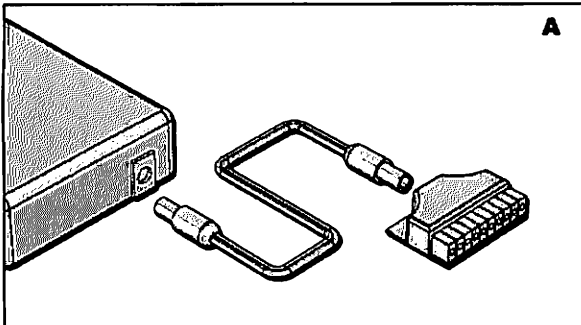
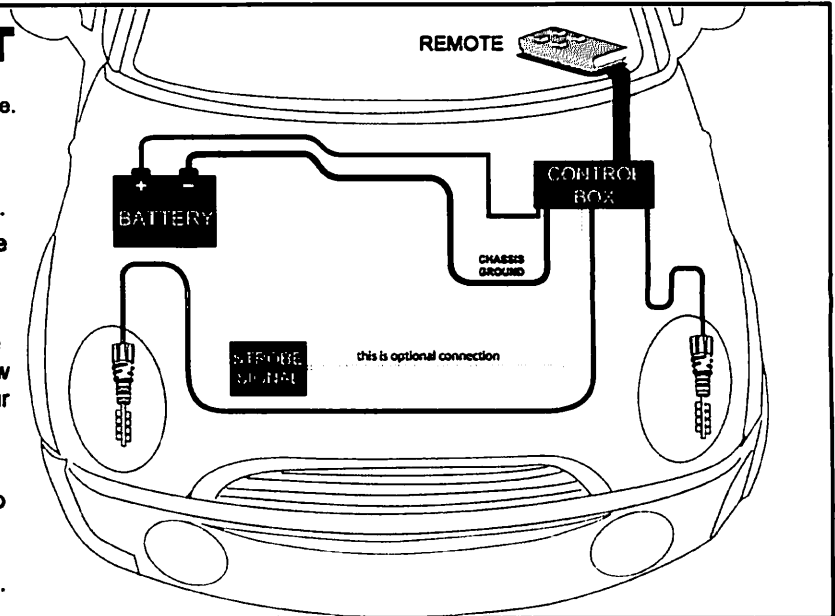


Figure A- Connect LED strobes and other 2-wire strobe accessories to the terminal block provided. The control box supports up to 1000 LEDs.

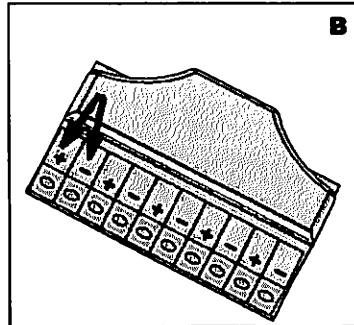


Figure B- Pay special attention to the polarity of each terminal, they alternate ground and positive.

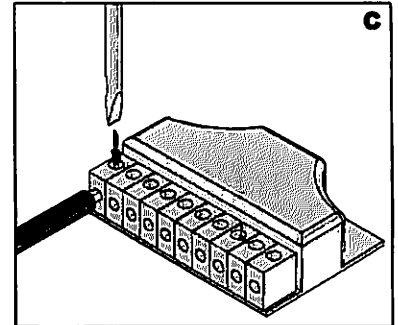


Figure C- Insert the exposed wire of each strobe/accessory into a hole and use a screwdriver to secure it.

